


BATTERYcharge 5PIN | 1PHASE | 16 AMP

Charging Cable for electric and plug-in hybrid vehicles



Type 2 to Type 1

Charge at home and on the move Type 2 to Type 1 5PIN | 1PHASE




16 Ampere

Connects to any charging unit or station with a 16A (1 phase) type 2 connection



3.6 kWh

Charge your 90kW battery and a 16A charge rate up to 3.6kWh



5m cable length

Ergonomic handles for optimal handling and a cable length of 5 meters



Drive with OSRAM into a more emission-free future

Discover the world of electric driving with OSRAM. Charge your all-electric or plug-in hybrid vehicle type 1 at any 16 A charging station (1 phase) equipped with a type 2 plug. The charging cable is equipped with ergonomic handles for optimal handling and has a cable length of 5 meters. It is suitable for use at public charging stations and at home. In addition, the charging cables are equipped with dust protection caps and tested for water resistance according to IP65 and shock resistance according to IK10. Even when connected, the electrical contact points are protected against the ingress of dust and splash water in accordance with IP65 and IK10. The scope of delivery also includes a durable, compact storage bag to neatly store the cable after charging. In addition, the product is TÜV and CE certified and comes with a 2-year guarantee*

Product datasheet

Technical data


Product information

Order reference	OCC11605
Storage Case	Yes
Number Of Phases	1
Vehicle Charger Type	Type1
Charging Point Charger Type	Type2

Electrical data

Nominal wattage	3600 W
Nominal voltage	240 V
Nominal current	16 A

Dimensions & weight

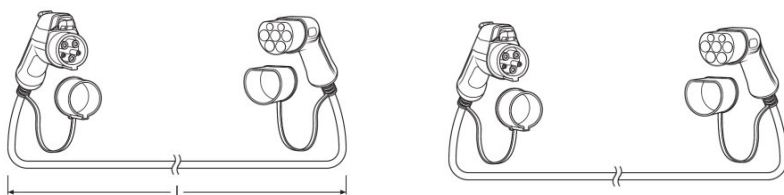

Length	5000 mm
Width	55.0 mm
Height	130.0 mm

Lifespan

Guarantee	2 years
-----------	---------

Additional product data

Operating Temperature	-40 +80 °C
-----------------------	------------

Certificates & standards

Standards	TÜV/CE
Type of protection	IP65
IK Class	IK10

Product datasheet

Country specific categorizations

Order reference	OCC11605
-----------------	----------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	19-01-2022
Primary Article Identifier	4052899624108
Declaration No. in SCIP database	In work

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899624108	BATTERY charge 5PIN 1PHASE 16 AMP	Sleeves 1	340 mm x 200 mm x 108 mm	7.34 dm ³	2120.00 g
4052899624177	BATTERY charge 5PIN 1PHASE 16 AMP	Shipping carton box 4	496 mm x 406 mm x 387 mm	77.93 dm ³	9430.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Application advice:

For more detailed application information and graphics please see product datasheet and user instruction

*for precise conditions please refer to:

www.osram.com/am-guarantee

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM