





Installation

Camera Add On Interface 771324-1038-1

Vehicles Seat/Skoda/VW mit MIB/MIB2

You can find detailed information about vehicle models, connection and function in our web shop at **https://shop.acvgmbh.de** Enter the article number in the search field. This will take you to the item description.

Before installation

Read the instructions before installation. Technical knowledge is required for installation. The installation location must be free of moisture and away from heat sources. Please ensure that you use the correct tools to prevent damage to the vehicle or product.

For vehicles that are not factory-fitted with reversing camera components, it may be necessary to change the vehicle system settings so that the retrofit camera can be used with the factory display using VCDS, VagCom or similar tools.

acv GmbH cannot be held responsible for the installation of this product.

Description

Plug and play, only for NTSC cameras, automatic switching on reverse gear, must have factory OPS, main unit must be coded.

Not compatible with the following part numbers 3Q0035820A, 3Q0035820, 3Q0035819A, 3Q0035819, 3Q0035812, 5G0035820A, 5G0035820, 5G0035819A, 5G0035819, 5G0035812

For professional installation only, requires special equipment and expertise to program the vehicle's internal settings to enable camera operation.

DISCLAIMER

The information contained in this document may vary without notice if changes are made to the product(s). These instructions are based on documented data and tests. acv GmbH cannot be held responsible for changes in vehicles


(e.g. software updates, hardware replacement) for damage that may result from the installation of this product.

ACV GmbH Straßburger Allee 10-12 41812 Erkelenz Germany

Fon: (02431) 9645-0 Fax:(02431) 9645-55 Mail: support@acvgmbh.de Web:www.acvgmbh.de Art.-Nr.: 771324-1038-1 Date 01/2024

Rev: 1 Page: 1/2

Installation

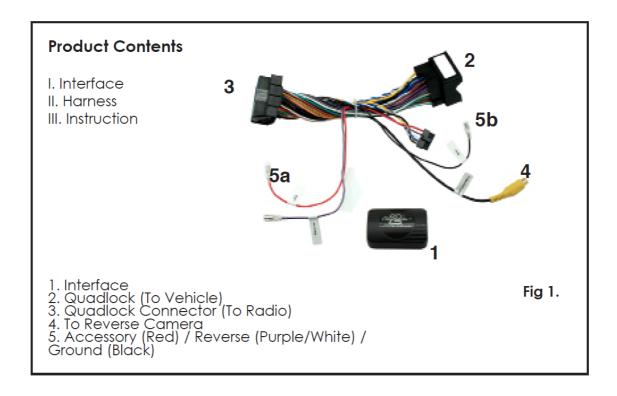

- 1. Remove the OEM head unit
- 2. Make the Quadlock connections to the vehicle and the radio as shown in Fig. 1.
- 3. Connect the yellow RCA plug to the output of the reversing camera.
- 4. Connect the accessory, reverse gear and earth cables
- 5. Test the correct function and reinstall the OEM main unit.

Technical support

acvGmbH would like to offer you a quick and appropriate solution to technical problems. When you contact us, you should therefore provide as much information as possible. This will speed up the process and help us to help you.

Seite: 1/3