



# **DEFA MultiCharger 1x12A** w/Remote LED

Item number: 706500

## **DEFA MultiCharger 1x12A** w/Remote LED

DEFA MultiCharger 1x12A w/Remote LED is based on modern switch-mode technology. These chargers represent the latest technology within battery charging and will give the batteries optimum life. It is well suited to battery sizes up to approx. 150Ah and can maintenance charge the battery for an unlimited time.

#### Installation

Equipment damage and possible injuries may result from an incomplete understanding of the installation and operation of the charger. If you are unfamiliar with electrical systems: consult us, a dealer or a licensed electrician. Read the mounting and user guide carefully.

#### Use


The charger can stand parallel current load up to 6A pr. channel from another user at the same time as it charge the battery. The charging voltage is temperature compensated with external sensor. The charger can be connected to a LED remote gauge.

#### **LED**

Green pulse - Charging, Green light - Fully charged, Red pulse - Error

#### Maintenance

The charger is maintenace free.

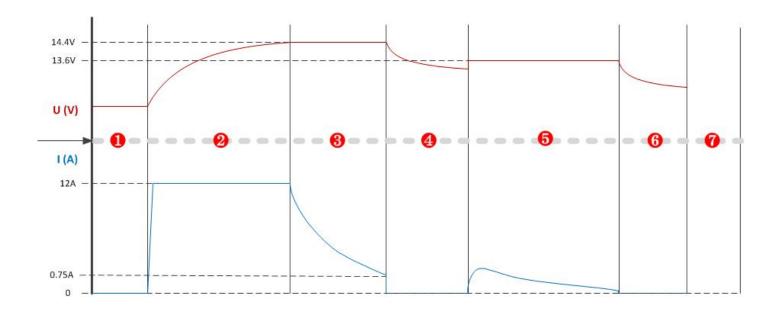



### **Specifications**

Item number 706500

Input voltage 230 VAC

Operating temperature -35/+50 °C

Charging voltage S1 14,4 VDC - Temperature-compensated approx

5,0 mV/°C/cell. Ref. 25°C.

Maintenance charging S2 13,5 VDC

Charging current, max 12A

Battery size, max 150 Ah

IP rating IP44

H/W/D 138x98x53 mm

Weight [kg]

Protection class 1

**Certifications** EN60335-1, EN60335-2-29, EN55014-1, EN55014-2, EN61003-3/2

DEFA AS is conforming to the requirements ISO 9001, ISO 14001 and ISO 45001. In addition to this, our engine heaters and cables are conforming to the requirements of IATF 16949.

